Application

- Matched to Booktree IC BT 8960

Feature


- Data transfer rate 288 kB/s
- SMD version upon request

Marking


- Manufacturer, middle block of ordering code, date code

Packing


- Polyfoam tray
- Packing unit: 500 pcs.

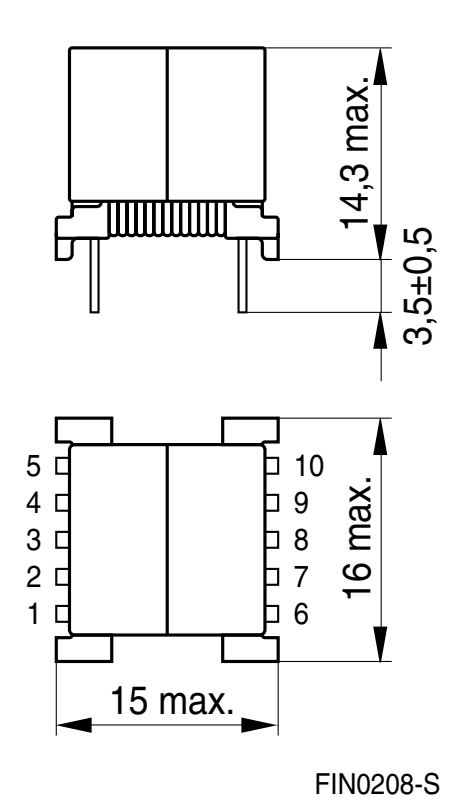

Pinning

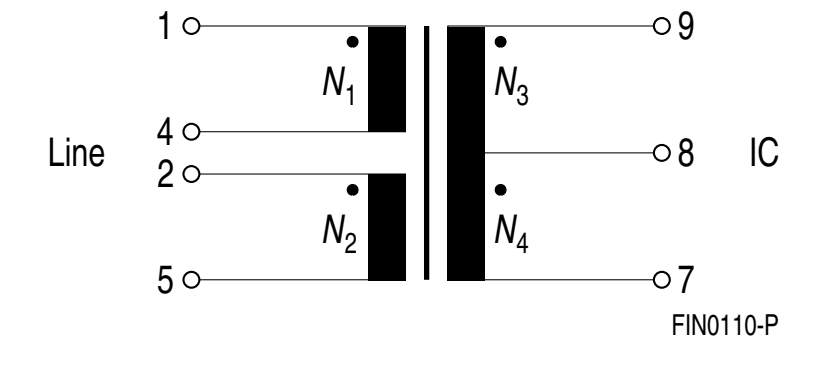

Recommended hole arrangement (view in mounting direction)



Technical data (electrical specifications at 25 °C)

Ordering code		B78421P1457A005
Type/Core		EP 13
$N_1 : N_2 : N_3 : N_4$		1 : 1 : 0,5 : 0,5
L_H	mH	5,11 ± 10 %
$R_{DC\ (Line)}$ (typ.)	Ω	2,64
$R_{DC\ (IC)}$ (typ.)	Ω	1,32
V_T	kV_{AC}	1,5
Operating temperature range	°C	–25/+85

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingung
nisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihne
genen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland.
können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte dar
unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgese
holen.

Published by EPCOS AG
Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY
☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

Purchase orders are subject to the General Conditions for the Supply of Products a
the Electrical and Electronics Industry recommended by the ZVEI (German Electrical
Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of
the international Representatives.

Due to technical requirements components may contain dangerous substances. For
the type in question please also contact one of our Sales Offices.